

Aleco Order Number: _____


Date: ____ / ____ / ____



IMPACDOR[®] XHD-175

Specifications: 1-7/8" Insulated, Rigid

Please fill out specifications form and send to Aleco. Add dimensions to illustration below. Signature is required before production can begin.

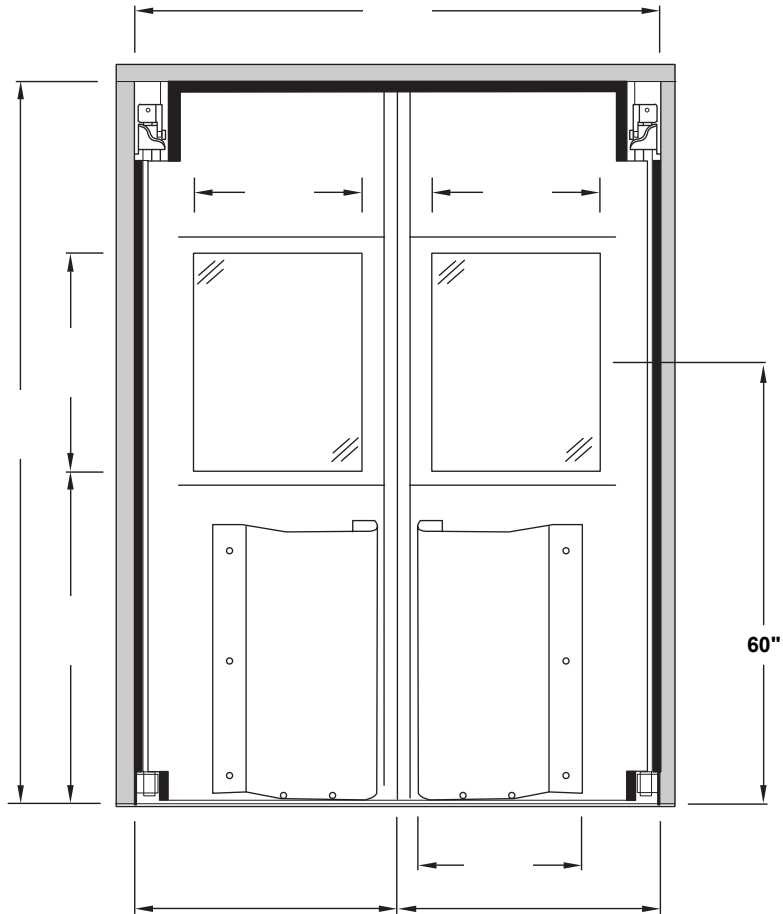

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION



I have reviewed the specifications and authorize Aleco to begin immediate manufacturing of ImpacDor XHD-175. I understand that this product will be custom made to my order specifications and is non-returnable.

Approved: _____ Date: _____
Company Name: _____ Phone: _____

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT
7.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Account Number: _____

Sold To: _____
Address: _____

Purchase Order #: _____

Ship To: _____
Address: _____

Special Markings/Instructions: _____

Quantity: _____ [] Single or [] Bi-Parting
(check one)

Finished Opening: _____ " Wide x _____ " High

COLOR SELECTION (check one)

- Forest Green Cadet Blue White Metallic Gray
- Cloud Gray Antique White Chocolate Brown Red
- Medium Brown Royal Blue Navy Black Beige
- Off White Fudge Brown Gray

DOOR FEATURES & OPTIONS

TEAR-DROP BUMPERS
BLACK POLYETHYLENE
42" High (standard)

- [] 12" High [] 30" High
- [] 18" High [] 36" High
- [] 24" High [] 42" High
- [] None

IMPACT PANELS
_____ " High

- [] ABS
- [] 20 GA. Stainless Steel
- [] None

LOWER HINGE

- [] Bottom bearing with Standard 8-1/4" jamb guard, 3-3/4" deep (3-1/2" minimum wall)
- [] Industrial 10-7/8" jamb guard, 5-1/2" deep (6" minimum wall)

WINDOW SIZES (Single Pane)

- [] 14-1/2" x 22 1/2"
- [] 20-1/2" x 22 1/2"
- [] 22-1/2" x 22 1/2"

FOR PRESSURE AND WIND LOADS

[] Spring Assist Kit

SEALS [] Full Perimeter Air Seal (standard)

V-CAM OPTIONS [] 1-1/2" Rise 90° x 90° (standard)

[] 1-1/2 Rise 90° x 180°

JAMB CONSTRUCTION

See lower hinge above

Aleco Part Number: _____