

Date: \_\_\_\_\_

ALECO® Quote Number: \_\_\_\_\_



### 3 PIECE KD CASE OPEN FRAME

*\*This is a flush-mount frame. Walls must be finished prior to frame installation.*

Customer: \_\_\_\_\_

Sold To \_\_\_\_\_  
Address: \_\_\_\_\_

Purchase Order #: \_\_\_\_\_

Ship To \_\_\_\_\_  
Address: \_\_\_\_\_

Quantity: \_\_\_\_\_ Single Bi-Parting

Finished Opening: \_\_\_\_\_" Width X \_\_\_\_\_" Height  
(Actual finished door size)

Calculate Rough Opening \_\_\_\_\_" Width X \_\_\_\_\_" Height  
(Add 4 1/4" to width and 2 1/8" to height of finished opening)

Jamb Depth \_\_\_\_\_"  
See diagram below frame image.

#### Frame Material:

Galvanneal  
(Primed - 12 GA)

Stainless Steel 304  
(14 GA)

#### Hinge:

EZ Offset Pivot

VCAM (Standard Hardware)

VCAM (Standard Hardware) with Jamb Guard Cover

VCAM Heavy Duty Combination Bottom/Jamb Guard

VCAM with Adjustable Spring Assist

VCAM 90 x 180

#### Anchors for Existing Opening:



Expansion Bolt Anchor  
(for Concrete Walls)

Wood Screw Anchor  
(for Wood Stud Walls)

*\*If used for steel studs, wood backing is required to secure jamb*

#### HARDWARE INCLUDED

- 8 - 3/8" x 1" Hex Head Grade 8 Bolts
- 8 - 3/8" Grade 8 Flat Washer
- 2 - Jamb Floor Brackets
- 8 - EOC Lag Bolts or Wood Screws (based on anchor selection)
- 6 - 1/2" x 4" Concrete Bolts

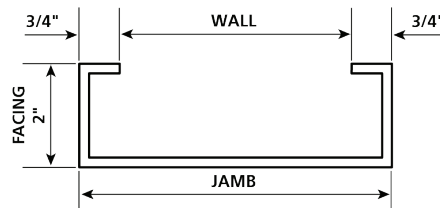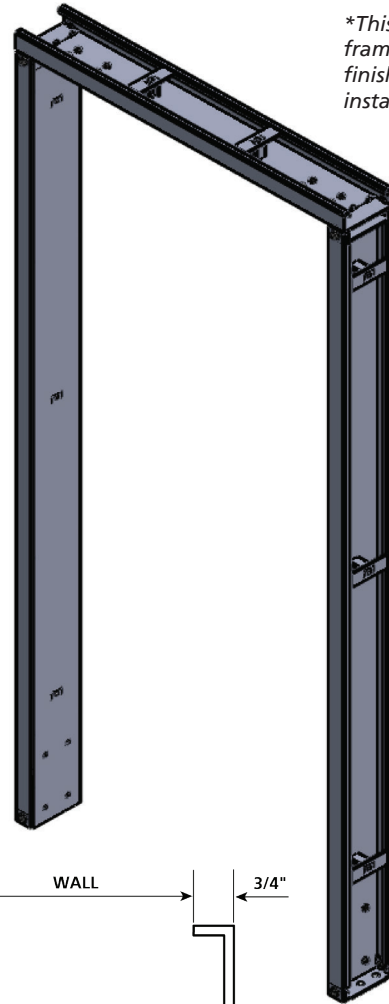

#### IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

Sign Here

*I have reviewed the specifications and authorize to begin immediate manufacturing of the **3 Piece KD Case Open Frame**. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

#### SPECIAL OPTIONS / NOTES

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_