

Date: _____

ALECO® Quote Number: _____

3 PIECE KD CASE OPEN FRAME

Customer: _____

Sold To _____
Address: _____

Purchase Order #: _____

Ship To _____
Address: _____

Quantity: _____ Single Bi-Parting

Finished Opening: _____" Width X _____" Height
(Actual finished door size)

Calculate Rough Opening _____" Width X _____" Height
(Add 4 1/4" to width and 2 1/8" to height of finished opening)

Jamb Depth _____"
See diagram below frame image.

Frame Material:

Galvanneal
(Primed - 12 GA)

Stainless Steel 304
(14 GA)

Hinge:

- EZ Offset Pivot
- VCAM (Standard Hardware)
- VCAM (Standard Hardware) with Jamb Guard Cover
- VCAM Heavy Duty Combination Bottom/Jamb Guard
- VCAM with Adjustable Spring Assist
- VCAM 90 x 180
- No pre drilled holes

Anchors for Existing Opening:

Expansion Bolt Anchor
(for Concrete Walls)



Wood Screw Anchor
(for Wood Stud Walls)

**If used for steel studs, wood backing is required to secure jamb*

HARDWARE INCLUDED

- 8 - 3/8" x 1" Hex Head Grade 8 Bolts
- 8 - 3/8" Grade 8 Flat Washer
- 2 - Jamb Floor Brackets
- 8 - EOC Lag Bolts or Wood Screws (based on anchor selection)
- 6 - 1/2" x 4" Concrete Bolts

**This is a flush-mount frame. Walls must be finished prior to frame installation.*

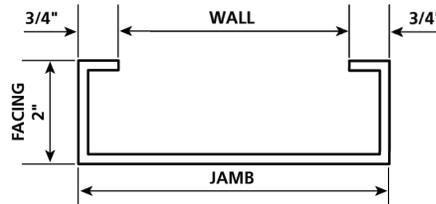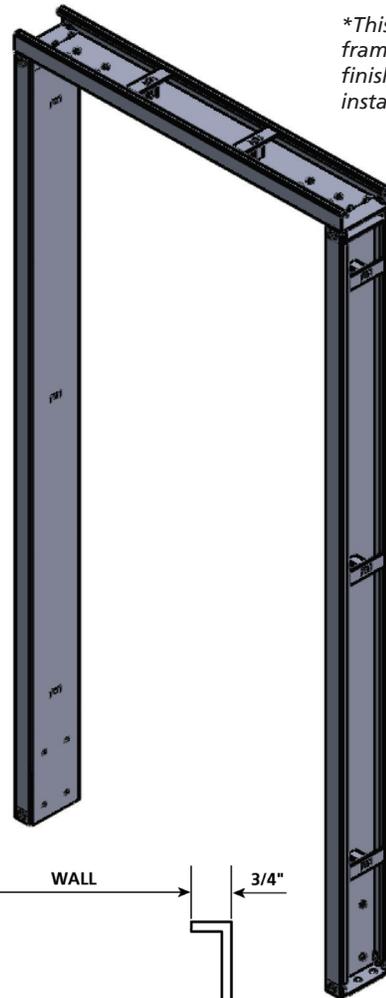

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

Sign Here

*I have reviewed the specifications and authorize to begin immediate manufacturing of the **3 Piece KD Case Open Frame**. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: _____ Date: _____

Company Name: _____

Phone: _____

SPECIAL OPTIONS / NOTES
