


Date: _____

ALECO® Quote Number: _____

ALECO[®]
by E·S·ROBBINS
IMPACDOR® FS-500

IMPORTANT: Provide measurements using the illustration below.

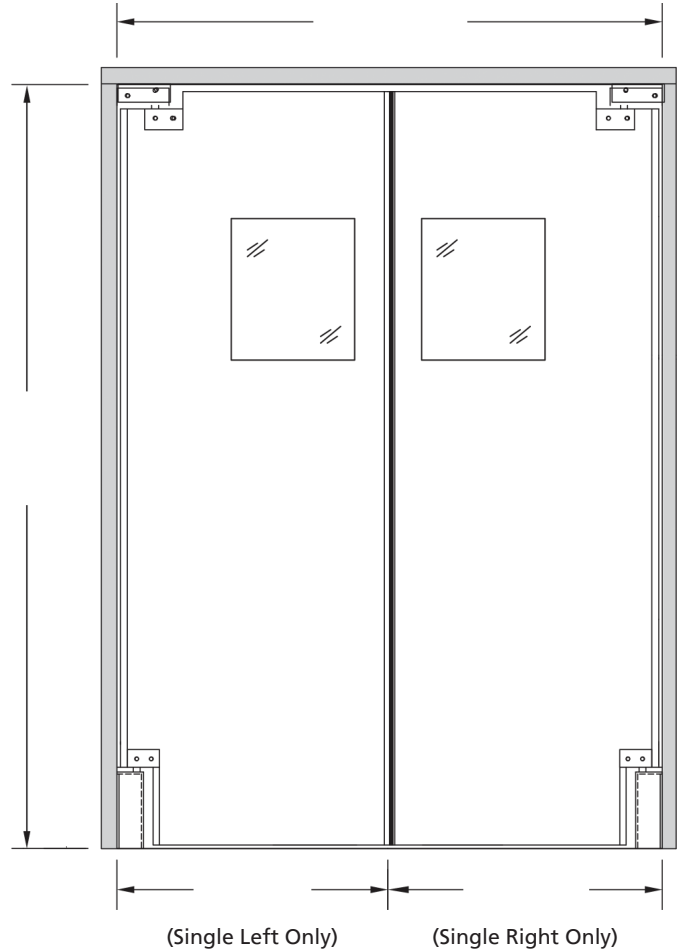

Note: Door Frame (shaded portion) not included.

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

I have reviewed the specifications and authorize ALECO® to begin immediate manufacturing of ImpacDor® FS-500. I understand that this product will be custom made to my order specifications and is non-returnable.

Approved: _____ Date: _____

Company Name: _____

Phone: _____

SPECIAL OPTIONS / NOTES

Account Number: _____

Sold To: _____

Address: _____

Purchase Order #: _____

Ship To: _____

Address: _____

Special Markings/Instructions: _____

Quantity: _____ **Single** **Bi-Parting**
**Please check only one.*

Finished Opening: _____" **W** **X** _____" **H**

SPECIFICATIONS:

3/4" Solid Core, Rigid

ABS FACING COLOR SELECTION: (check one)

White (Standard) **Black (Standard)**

Custom ABS Color Options:

Dove Gray	Fieldstone Gray	Royal Red
Leather Brown	Dutch Chocolate	Desert Beige
Marine Blue	Canyon Blue	

DOOR FEATURES & OPTIONS:

ABS Wear Panel (Enter desired height. Panel will be width of door.)

NONE _____" Height

ABS Wear Panel Color _____

(Enter desired Wear Panel color)

Stainless Steel - 20 GA:

Push Plates 4"x12" Kick Plate Height: _____
(Maximum height 48")

Window Size: Dual Pane Flush Mount

NONE **9" x 14" (Recommended)**
14" x 16" 9" x 30"

FEATURE NOTES:

- **NO PERIMETER SEALS AVAILABLE**
- **JAMB CONSTRUCTION:** Hinge requires a minimum double 2 x 4 inch wood jamb or equal. Jamb must be square and plumb.
- **JAMB GUARD/HINGE:** EZ Hinge with 8-3/4" high x 3" Deep Jamb Guards (all stainless steel)