

Date: _____


ALECO® Quote Number: _____



by E·S·ROBBINS

IMPACDOR® FD-175

IMPORTANT: Provide measurements using the illustration below.

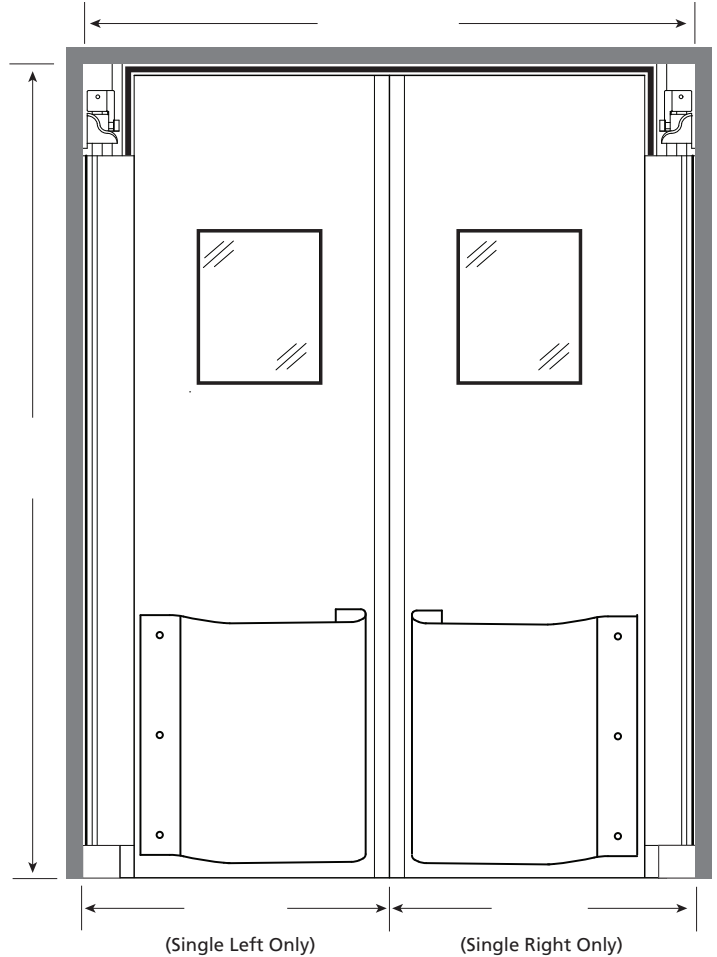

Note: Door Frame (shaded portion) not included.

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

I have reviewed the specifications and authorize ALECO® to begin immediate manufacturing of ImpacDor® FD-175. I understand that this product will be custom made to my order specifications and is non-returnable.

Approved: _____ Date: _____

Company Name: _____

Phone: _____

SPECIAL OPTIONS / NOTES

Account Number: _____

Sold To: _____

Address: _____

Purchase Order #: _____

Ship To: _____

Address: _____

Special Markings/Instructions: _____

Quantity: _____ **Single** **Bi-Parting**
*Please check only one.

Finished Opening: _____" **W** **X** _____" **H**

SPECIFICATIONS:

1-3/4" Thick, Insulated

ABS FACING COLOR SELECTION: (check one)

- | | | |
|----------------------------------|-------------------------|--------------|
| White (Standard) | Black (Standard) | |
| Custom ABS Color Options: | | |
| Dove Gray | Fieldstone Gray | Royal Red |
| Leather Brown | Dutch Chocolate | Desert Beige |
| Marine Blue | Canyon Blue | |

DOOR FEATURES & OPTIONS:

Bumpers: NONE Tear-Drop (48"wide) Standard

Bumper Size (check one):

12" Height	24" Height	42" Height
18" Height	36" Height	48" Height

ABS Wear Panel (Enter desired height. Panel will be width of door. Wear panel required for doors that exceed 96" high.)

NONE _____" Height

ABS Wear Panel Color _____
(Enter desired Wear Panel color.)

Stainless Steel - 20 GA:
Push Plates 4"x12" Kick Plate Height: _____ (Max. ht. 48")

For Pressure and Wind Loads: NONE

Fixed Spring Assist Kit (Top)	Adjustable Spring Assist Kit (Bottom) <small>(Aluminum 1-5/16" Bottom Bearing and 11-1/8" Jamb Guard Cover is Required with Adjustable Spring Kit)</small>
-------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------

Full Perimeter Air Seals: Yes No

Window Options: NONE

Dual Pane, Flush Mounted; 1/8" Thick Polycarbonate (Standard)	Dual Pane, Rounded Corners, Set in Black Rubber Gasketing (Optional)
14" x 16" (Recommended)	9" x 14" (Recommended)
22" x 22"	9" x 30"
	14" x 16"

Casted V-Cam Hinge:	Lower Hinge:
1-1/2" Rise 90 x 90 Degree (Recommended Hinge)	1-5/16" Plastic Bottom Bearing (Recommended)
1-1/2" Rise 90 x 180 Degree (Opt.)	1-5/16" Aluminum Bottom Bearing (Opt.)
	4" Casted Combination Bottom Bearing/Jamb Guard (Opt.)
	11-1/8" Jamb Guard Cover (Opt.)

Weld Plates: Yes No

