

Date: \_\_\_\_\_


ALECO® Quote Number: \_\_\_\_\_



by E·S·ROBBINS

# IMPACDOR® XHD-175

**IMPORTANT: Provide measurements using the illustration below.**

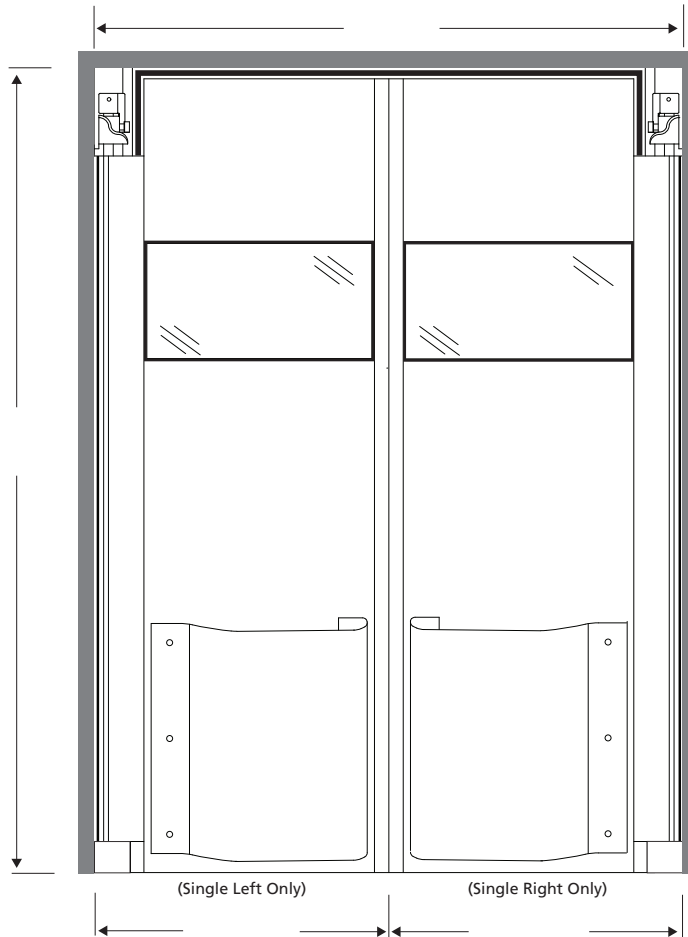

**Note: Door Frame (shaded portion) not included.**

### IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

*I have reviewed the specifications and authorize ALECO® to begin immediate manufacturing of **ImpacDor® XHD-175**. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

### SPECIAL OPTIONS / NOTES

Account Number: \_\_\_\_\_

Sold To: \_\_\_\_\_

Address: \_\_\_\_\_

Purchase Order #: \_\_\_\_\_

Ship To: \_\_\_\_\_

Address: \_\_\_\_\_

Special Markings/Instructions: \_\_\_\_\_

Quantity: \_\_\_\_\_ **Single** **Bi-Parting**

*\*Please check only one.*

Finished Opening: \_\_\_\_\_ " W **X** \_\_\_\_\_ " H

### SPECIFICATIONS:

1-3/4" Thick, Insulated, Rigid  
Welded Aluminum Frame

### ABS FACING COLOR SELECTION: (check one)

**White (Standard)**      **Black (Standard)**

### Custom ABS Color Options:

Dove Gray      Fieldstone Gray      Royal Red  
Leather Brown      Dutch Chocolate      Desert Beige  
Marine Blue      Canyon Blue

### DOOR FEATURES & OPTIONS:

#### Tear-Drop Bumpers

Black Polyethylene  
(42" High Standard)

**None**

#### Bumper Size (Check One):

12" Height      36" Height  
18" Height      42" Height  
24" Height

#### Window Size (Dual pane flush mount):

22" H x Full Door Width (Standard)  
(Window height subject to change based on overall door size)

#### Optional - For Pressure and Wind Loads:

##### Fixed

Fixed Spring Assist Kit  
(Top Mount Only)

**None**

##### Adjustable

Adjustable Spring Assist Kit  
Aluminum 1-5/16" Bottom Bearing  
and 11-1/8" Jamb Guard Cover is  
Required (Bottom Mount Only)

#### Full Perimeter Air Seals

#### Casted V-Cam Hinge:

**1-1/2" Rise 90 x 90 Degree (Recommended Hinge)**

1-1/2" Rise 90 x 180 Degree (Optional)

#### Lower Hinge:

4" Casted Combination Bottom Bearing/Jamb  
Guard (Recommended)

1-5/16" Aluminum Bottom Bearing; W/ 11-1/8" Jamb Guard  
Cover (Required with Adjustable Spring Kit), Bottom

Bottom Bearing 90 x 180 Degrees (Optional)

Weld Plates:                      Yes                      No