

Date: _____

ALECO® Quote Number: _____




by E·S·ROBBINS

IMPACDOR® RD-175

Specifications: 1-3/4" Insulated Foam Core

IMPORTANT: Provide measurements using the illustration below.

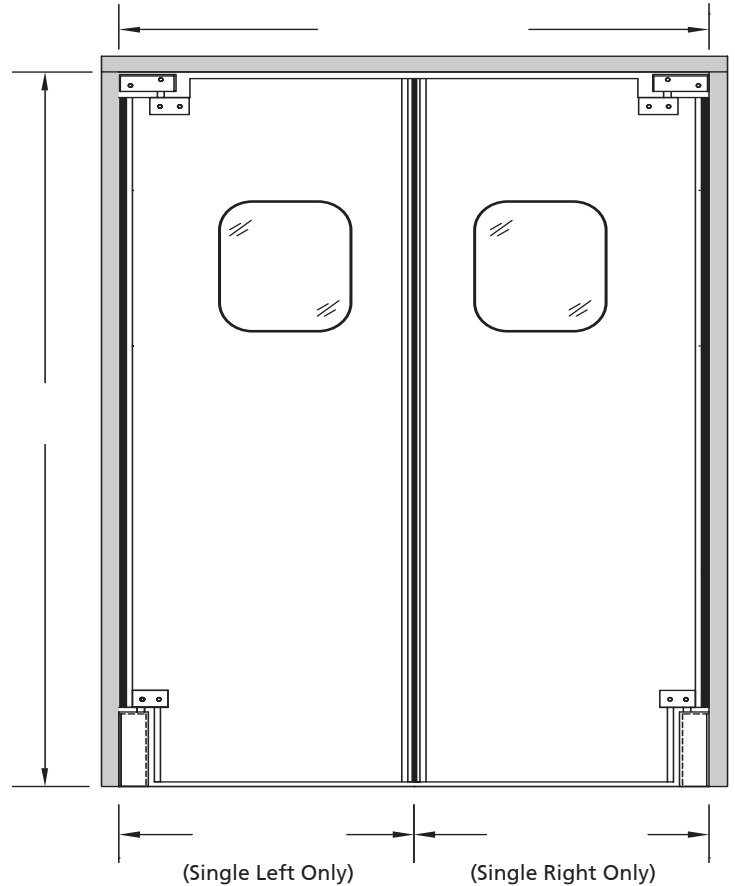

Note: Door Frame (shaded portion) not included.

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

I have reviewed the specifications and authorize ALECO® to begin immediate manufacturing of ImpacDor® RD-175. I understand that this product will be custom made to my order specifications and is non-returnable.

Approved: _____ Date: _____

Company Name: _____

Phone: _____

SPECIAL OPTIONS / NOTES

Account Number: _____

Sold To: _____

Address: _____

Purchase Order #: _____

Ship To: _____

Address: _____

Special Markings/Instructions: _____

Quantity: _____ **Single** **Bi-Parting**
**Please check only one.*

Finished Opening: _____" W X _____" H

ABS FACING COLOR SELECTION: (check one)

White (Standard)

Black (Standard)

Custom ABS Color Options:

Dove Gray

Fieldstone Gray

Royal Red

Leather Brown

Dutch Chocolate

Desert Beige

Marine Blue

Canyon Blue

DOOR FEATURES & OPTIONS:

Bumpers:

NONE

Tear-Drop Bumpers Black
Polyethylene (standard)

Bumper Size (check one):

12" Height 36" Height

18" Height 42" Height

24" Height 48" Height

ABS Wear Panel (Enter desired height. Panel will be width of door.)

NONE _____" Height

ABS Wear Panel Color _____

(Enter desired Wear Panel color)

Window Size: Dual Pane set in Black Rubber Molding

NONE

14" x 16" (Standard Size)

9" x 14"

9" x 30"

Stainless Steel - 20 GA:

Push Plates
4" x 12"

Kick Plates: 24 inch 36 inch

FEATURE NOTES:

- FULL PERIMETER GASKETING IS STANDARD
- JAMB CONSTRUCTION: EZ Hinge requires a minimum double 2x4 inch wood jamb or equal. Jamb must be square and plumb.
- JAMB GUARD/HINGE: EZ Hinge with 8-3/4" High x 3" Deep Jamb Guards (all stainless steel)