

Date: _____

ALECO® Quote Number: _____




by E·S·ROBBINS

IMPACDOR® FD-175

Specifications: 1-3/4" Thick, Insulated

IMPORTANT: Provide measurements using the illustration below.

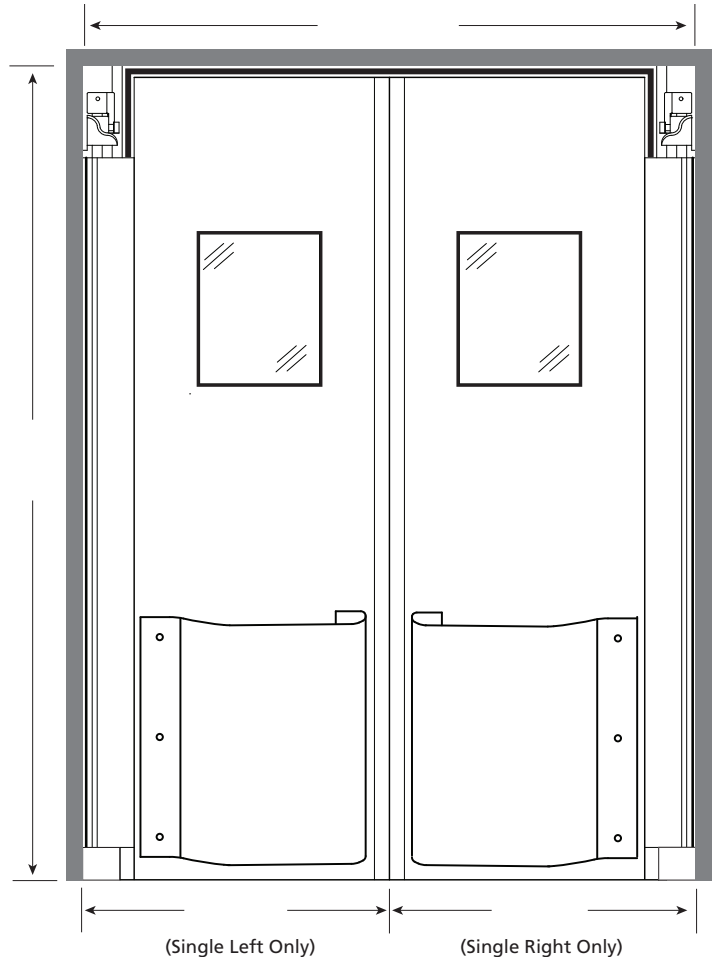

Note: Door Frame (shaded portion) not included.

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

I have reviewed the specifications and authorize ALECO® to begin immediate manufacturing of ImpacDor® FD-175. I understand that this product will be custom made to my order specifications and is non-returnable.

Approved: _____ Date: _____

Company Name: _____

Phone: _____

SPECIAL OPTIONS / NOTES

Account Number: _____	
Sold To: _____	
Address: _____	
Purchase Order #: _____	
Ship To: _____	
Address: _____	
Special Markings/Instructions: _____	
Quantity: _____	Single Bi-Parting <i>*Please check only one.</i>
Finished Opening: _____ " W X _____ " H	
ABS FACING COLOR SELECTION: (check one)	
<input type="checkbox"/> White (Standard)	<input type="checkbox"/> Black (Standard)
Custom ABS Color Options:	
<input type="checkbox"/> Dove Gray	<input type="checkbox"/> Fieldstone Gray <input type="checkbox"/> Royal Red
<input type="checkbox"/> Leather Brown	<input type="checkbox"/> Dutch Chocolate <input type="checkbox"/> Desert Beige
<input type="checkbox"/> Marine Blue	<input type="checkbox"/> Canyon Blue
DOOR FEATURES & OPTIONS:	
Bumpers:	Bumper Size (check one):
<input type="checkbox"/> NONE	<input type="checkbox"/> 12" Height <input type="checkbox"/> 36" Height
<input type="checkbox"/> Tear-Drop (48" Wide)	<input type="checkbox"/> 18" Height <input type="checkbox"/> 42" Height
<input type="checkbox"/> Standard	<input type="checkbox"/> 24" Height <input type="checkbox"/> 48" Height
ABS Wear Panel (Enter desired height. Panel will be width of door. Wear panel required for doors that exceed 96" high.)	
<input type="checkbox"/> NONE _____ " Height	
ABS Wear Panel Color _____ (Enter desired Wear Panel color.)	
Window Options:	<input type="checkbox"/> NONE
<input type="checkbox"/> Dual Pane, Flush Mounted; 1/8" Thick Polycarbonate (Standard)	<input type="checkbox"/> Dual Pane, Rounded Corners, Set in Black Rubber Gasketing (Optional)
<input type="checkbox"/> 14" x 16" (Standard Size)	<input type="checkbox"/> 9" x 14" (Standard Size)
<input type="checkbox"/> 22" x 22"	<input type="checkbox"/> 9" x 30"
	<input type="checkbox"/> 14" x 16"
For Pressure and Wind Loads:	
<input type="checkbox"/> Fixed Spring Assist Kit	<input type="checkbox"/> Adjustable Spring Assist Kit (Aluminum 1-5/16" Bottom Bearing and 11-1/8" Jamb Guard Cover is Required with Adjustable Spring Kit)
<input type="checkbox"/> NONE	
Full Perimeter Air Seals:	<input type="checkbox"/> Yes <input type="checkbox"/> No
Stainless Steel - 20 GA:	
<input type="checkbox"/> Push Plates 4" x 12"	<input type="checkbox"/> Kick Plates: 24 inch 36 inch
Casted V-Cam Hinge:	Lower Hinge:
<input type="checkbox"/> 1-1/2" Rise 90 x 90 Degree (Standard Hinge)	<input type="checkbox"/> 1-5/16" Plastic Bottom Bearing (Stand.)
<input type="checkbox"/> 3/4" Rise 90 x 90 (Opt.)	<input type="checkbox"/> 1-5/16" Aluminum Bottom Bearing (Opt.)
<input type="checkbox"/> 1-1/2" Rise 90 x 180 Degree (Opt.)	<input type="checkbox"/> 4" Casted Combination Bottom Bearing/ Jamb Guard (Opt.)
	<input type="checkbox"/> 11-1/8" Jamb Guard Cover (Opt.)
Weld Plates:	<input type="checkbox"/> Yes <input type="checkbox"/> No