

Date: \_\_\_\_\_

ALECO® Quote Number: \_\_\_\_\_




by E·S·ROBBINS

# IMPACDOR® MAGNA

**Specifications:** 3/8" Flexible PVC with Opaque Lower Section

**IMPORTANT:** Provide measurements using the illustration below.

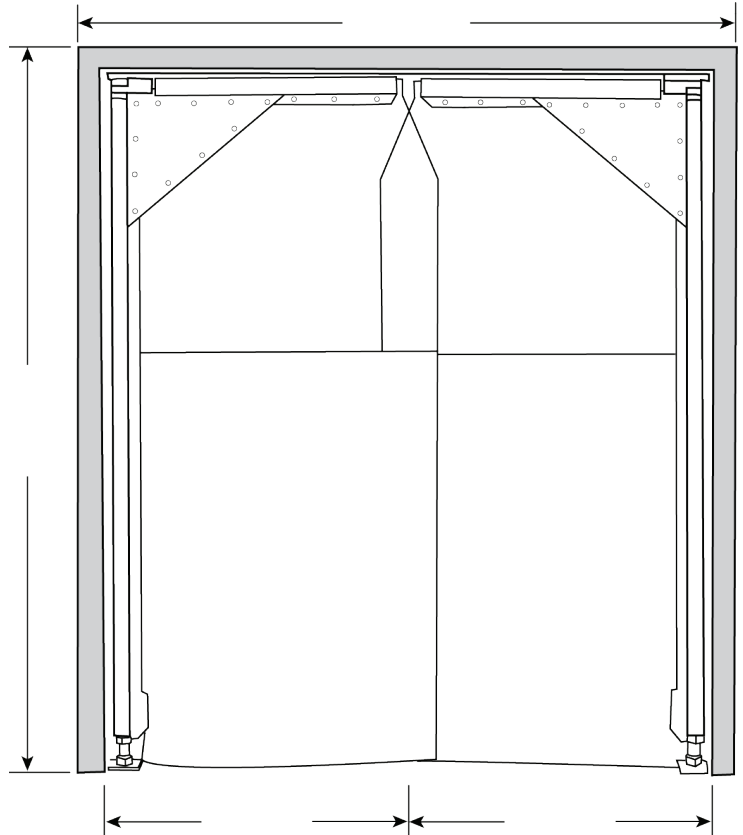

**Note:** Door frame (shaded portion) not included.

**IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION**

*I have reviewed the specifications and authorize ALECO® to begin immediate manufacturing of **ImpacDor® Magna**. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

**SPECIAL OPTIONS / NOTES**

Account Number: \_\_\_\_\_

Sold To: \_\_\_\_\_

Address: \_\_\_\_\_

Purchase Order #: \_\_\_\_\_

Ship To: \_\_\_\_\_

Address: \_\_\_\_\_

Special Markings/Instructions: \_\_\_\_\_

Quantity: \_\_\_\_\_ **Single** **Bi-Parting**  
*\*Please check only one.*

Finished Opening: \_\_\_\_\_" W X \_\_\_\_\_" H

**DOOR FEATURES & OPTIONS:**

**Panel:** 3/8" crystal clear PVC upper section with gray opaque lower section is standard

**Hinge:** Galvanized full-length frame of 13 or 11 gauge wall thickness (depending on overall door size)

**Closing Mechanism:** Adjustable torsion spring. Swings on even plane 180°

**Field Modify:** Up to 4" in height and 5" in width

**Custom Sizes:** Consult factory

**Formulation:** Standard (indoor/outdoor)

**Aleco Part Number:** \_\_\_\_\_

**FEATURE NOTES:**

**Approximate Weight:**  
6.5 lbs. per sq. ft. X \_\_\_\_\_ sq. ft. = \_\_\_\_\_ lbs.

Sign Here