

Date: \_\_\_\_\_

ALECO® Quote Number: \_\_\_\_\_




by E·S·ROBBINS

# IMPACDOR® XHD-175

Specifications: 1-3/4" Thick, Insulated, Rigid

**IMPORTANT:** Provide measurements using the illustration below.

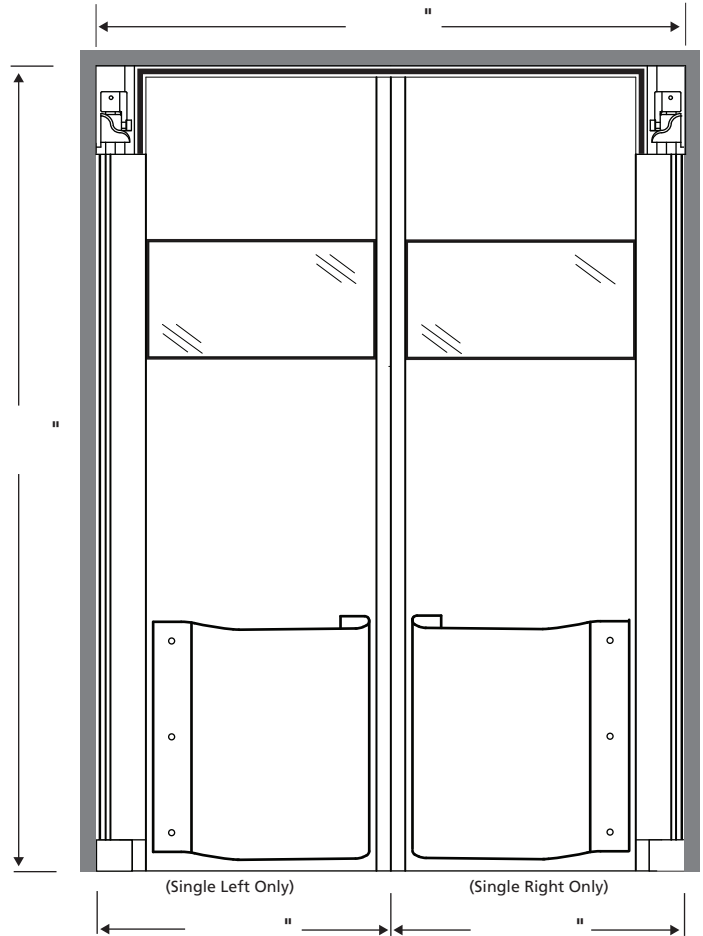

**Note:** Door Frame (shaded portion) not included.

### IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

*I have reviewed the specifications and authorize ALECO® to begin immediate manufacturing of ImpacDor® XHD-175. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

### SPECIAL OPTIONS / NOTES

Account Number: \_\_\_\_\_

Sold To: \_\_\_\_\_

Address: \_\_\_\_\_

Purchase Order #: \_\_\_\_\_

Ship To: \_\_\_\_\_

Address: \_\_\_\_\_

Special Markings/Instructions: \_\_\_\_\_

Quantity: \_\_\_\_\_ **Single** **Bi-Parting**

*\*Please check only one.*

Finished Opening: \_\_\_\_\_ " W X \_\_\_\_\_ " H

### ABS FACING COLOR SELECTION: (check one)

**White** (Standard)

**Black** (Standard)

### Custom ABS Color Options:

Dove Gray

Fieldstone Gray

Royal Red

Leather Brown

Dutch Chocolate

Desert Beige

Marine Blue

Canyon Blue

### DOOR FEATURES & OPTIONS:

**Tear-Drop Bumpers**  
Black Polyethylene  
(42" High Standard)

**Bumper Size** (Check One):

12" Height  36" Height

18" Height  42" Height

None

24" Height  48" Height

### Window Sizes (Dual pane flush mount):

22" H x Full Door Width\*

\*Window height subject to change based on overall door size.

### Optional - For Pressure and Wind Loads:

**Fixed**

Fixed Spring Assist Kit  
(Top Mount Only)

**Adjustable**

Adjustable Spring Assist Kit  
Aluminum 1-5/16" Bottom  
Bearing and 11-1/8" Jamb  
Guard Cover is Required  
(Bottom Mount Only)

None

**Full Perimeter Air Seals:**  Yes  No

### Casted V-Cam Hinge:

1-1/2" Rise 90 x 90 Degree (Standard Hinge)

1-1/2" Rise 90 x 180 Degree (Optional)

### Lower Hinge:

4" Casted Combination Bottom Bearing/Jamb Guard (Standard)

1-5/16" Aluminum Bottom Bearing; W/ 11-1/8" Jamb Guard Cover (Required with Adjustable Spring Kit), Bottom

Bottom Bearing 90 x 180 Degrees (Optional)

**Weld Plates:**  Yes  No